Panel 11

Scott II-27—58,004—4-11-46.

DEV (1947) Department.

Ms. SERIES.

G.O. NO. 4167

Dated 25 8 47

[Despatch Abstract.]

Yardships - Sericulture - Girls Silk filatures, Kollegal - Repairs to weavers quarters - Expenditure sanctioned

DEPARTMENT OF INDUSTRIES AND COMMERCE, MADRAS.

From
The Director of Industries and Commerce, Madras.

To
The Secretary to Government, Development Department, Madras.

No.3709-D/47 dated 1st August 1947.

Rec'd 73444 D(W)
4 - AUG 1947
DEVELOPMENT DEPARTMENT

Sir,

Sub: Government Silk Filatures-Kollegal-Repairs to the wall of the chowkidair ~~xxxxxx~~ quarters-Expenditure-Sanction-

Rx

The General Manager reports that the western side wall of the east block of the Chowkidar's quarters has settled down leaving a 2" gap at the top due to shrinkage of the foundation built on black cotton soil. To prevent further damage and collapse of the wall in the rainy season, necessary repairs to the wall have to be attended to immediately. I enclose an estimate for Rs.90/- to build a buttress wall on the outside of the wall as shown in the sketch enclosed and fill in the inside cracks with brick and tar after providing two bond stones one on each side. I request that Government may be pleased to sanction the expenditure of Rs.90/- towards the repair.

In view of the urgency of the repairs I have asked the General Manager, Government Silk Filatures, Kollegal to proceed with the work in anticipation of Government sanction, and request that my action ~~xx~~ in this regard may also be approved.

The expenditure is debitable to 85 A.Capital Outlay on Provincial Schemes of State Trading etc.-8 Other Charges (ii) Miscellaneous Expenses.

ka/2/8.

S. R. Srinivasan.
for Director of Industries and Commerce, Madras.

Plg. Secy TH
dt 6.8 Encdt

51/878

TM

To the D.M.C.

Agri Dept

Sec. Industries - Agriculture - U.T., Chandigarh - Repairs to the wall of the chowkidar's quarters Expenditure - Sanction of.

C.f. Ref: Your letter No. 3709-D(U) dt. 1-8-67.

Sketch and the estimate for Rs 90/- to build a bitters wall said to have been enclosed with the letter cited has not been received. Please send them.

P.C. to Sec. Agri. dt. 20.8.67

To (687) dt. 6847

6 Aug

O.N. In view of R on p. 1/c, it is perhaps not necessary to call for the enclosures. As the letter on p. 1/c is however incomplete without the enclosures, the draft reply above is held in abeyance.

AM 7/8

No.3709-D/47 dated 9/8/47 — Industries and Commerce Department

From: The Director of Industries and Commerce, Madras

To: The Under Secretary to Government, Development Department, Madras

UNDER SECRETARY TO GOVT. 10 AUG 1947 DEVELOPMENT DEPARTMENT

76280

Sub:- Industries - Sericulture - Government Silk Filatures - Repairs to the walls - Chowkidars quarters.

Ref:- Government telephonic message dated 7/8/47.

The sketch and the estimate for Rs 90/- are sent herewith.

for Director of Industries & Commerce

JL.9/8

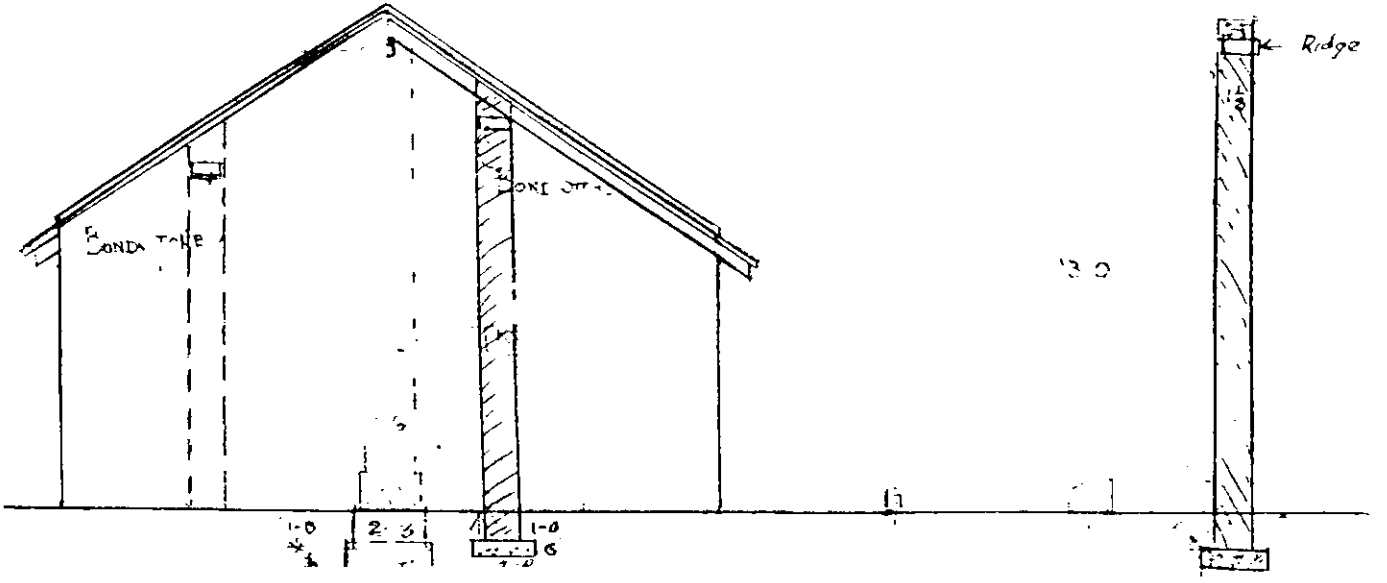

G. Abdul Azeez.
S.O.C.W.
31.7.47.

Estimate Detailed Measurement Sheet

Name of work:- ~~Repairs to~~ Providing & building wall on the western side of the Eastern block of Chamkidih gra- Govt silk nursery - Kollegal.

Details	Number	Measured in feet Length	Breadth	Depth	Boxes or Constant	Total
1) Earth work excavation foundations in clayey soil						
Foundation - Pontoon wall	1	3-6	4-8½	5-0	73	106
Total						75
2) Concrete 1:4:8 stone in lime mortar.						
Foundation - Pontoon wall	1	3-6	3-9	1-6	20	
Total						26
3) Brick work in lime mortar (with country bricks)						
Foundation :- Pontoon wall. 1st footing	1	2·7½	2-6½	1-6		12
" 2nd "	1	2-3	3·4½	1-6		8
Basement -	1	1-10½	3·2¼	1-0		6
Superstructure	1	1-6	3-0+1-0 / 2	13-0		39
Total						70
4) Plastering with Cement mortar 1:5 ½" thick						
Front- face	1	1-6		13·0	20	
Sides	2	3-0+1-0 / 2		13-0	52	
Top	1	1-6	1-0		2	
Basement- allround 3 sides	1	8·3		1-2½	10	
Total						84 or 10
5) Cut Stone 2 line dressed to Size on all faces - & fixed in Cement mortar	2	3-0	1-0	0-4	2·0	
Total						2
6) Filling Cracks with bricks & mortar						4·5

Executive Engineer

Name of work:- Hlesbad of Estimate

Quantity	Particulars of work	S.J Number	Rate	per	Amount	Total
100 Cft	1) Earth work excavation foundation in clay & Soil		15 10 -	1000 Cft	2 - -	✓
20 Cft	2) Concrete broken Stone in lime mortar		66 - -	100 Cft	13 - -	✓
70 Cft	3) Brick work in lime mortar with country bricks		67 8 -	"	47 - -	
					51 - -	
100 Sft	4) Plastering with Cement mortar 1:3 $\frac{1}{2}$" thick		10 4 -	100 Sft	10 - -	✓
2 Cft	5) Cut Stone 2 lines dressed to Size on all faces & fixed in Cement mortar.		4 4 -	Cft	9 - -	
L.S	6) Filling in Cracks with bricks & mortar. 3		L.S -		5 - -	
					~~90 -~~	86 -
	Contingencies @ 5% Spent in Charge.				~~10~~	4 -
					~~100~~	90 -
	Total Rs					~~100~~
						= Rs. 90/-

Divl. Inspector
Spl. Works

G. Abdul Azeez
S.O. C.W.
31.7.47.

Data

Quantity	Description of Item	No	Rate per	Amount	Total
1000 ft	1) Earth work in excavating foundation				
		15 ft 14 A	15 To	Cop ft	15 To.
		Total			15 To.
100 ft	2) Lime concrete 1:2				
60 ft	Lime	100 lb	40	60 . . 100 ft	30 . .
100 ft	Sand for mortar	" 36 A		1 6 . .	1 6 .
100 ft	Gravel for concrete	do 43 A		- 14 ft -	8 5 4
	Contra				- 6 8
	Total				40 2 0
	3) 100 ft Cement-mortar 1:3				40 2.
3000 lb	Cement at Kingani			87 6 3 Ton	112 9 3
100 ft	Sand for concrete			1 6 100 ft	. 1 6
100 ft	Carriage in small quantities as required for the building			3 . . 100 lb	3 1 3
	Contra				116 12
	Total				116 12.
	4) 100 ft Concrete footing in lime mortar				
100 ft	Broken Stone 1½ inch	133 C		13 . . 100 ft	13 . .
40 ft	Lime mortar			40 2 . .	16 - 10
½ No	Mason 2nd class	3		2 4 . . each	1 2 -
5 "	Man Coolies	15 To	13	1 1 6 "	5 7 6
4 .	Women coolies	"	14	- 10 - "	2 8 .
100 ft	Broken Stone Carried 4 miles 3 miles Select 1½ inch			235 6 100 ft	235 6
20 ft	Stone Carried 40 feet ½ mile			10 3 9	2 . 9
40 ft	Sand Carried ½ mile			5 7 4 6	2 8 10
	Contra				. 1 7
	Total				66

5) 100 Sft. Brick work in lime mortar with Country bricks

1700 no	Bricks		NR	15 - - 1000	25 8 -
35 Cft.	Lime mortar 1:2			40 2 - Cft.	14 - 8
½ no	Brick layer 1st Class		3	2 12 - each	1 6 -
3½ "	do 2nd			2 4 - "	7 14 -
2 no	Men Coolies			1 6	2 3 -
6 "	Women Coolies			- 10 -	3 12 -
1700 no	Bricks Carried 1½ miles			5 2 6 1000	8 12 3
17½ Cft.	Lime Carried 4½ miles			10 3 9 100 Cft.	1 12 8
85 Cft.	Sand Carried ½ to 1 mile CT			5 1 6	2 1 1
	- Sundries				- 2 4
					67 8

Total 67 8

6) 100 Sqft. Plastering with Camel-mortar 1:3 ½" thick

5 Cft.	Camel-mortar 1:3		16 12 - 100 Cft.	6 4 3 5
1 no	Brick layer 1st Class		2 12 - each	2 12 -
½ "	Ordn Coolie		1 1 6 "	- 8 9
1 no	Women Coolie		- 10 "	- 10
5 1/3 Cft.	Camel Carried 1½ miles		6 9 - 100 Cft.	0 8 10
5 Cft.	Sand Carried ½ to 1 mile CT		5 1 6 100 Cft.	- 4 9
	- Sundries			1 3
				10 4 - 10 4

7) 1 Cft. Cut-Stone 2 lines dressed to size on all 4 edges & fixed in Camel mortar.

1 Cft.	Cut-Stone		3 12 - Cft.	3 1 -
1 "	do Carried 6 miles from Stone Quarries on Head (½) miles CT ½ mile Head Load		37 15 9 100 Cft.	6 1
	- Sundries, Scaffolding & Sundries			- 1 11
				4 4 - 4 4

Total

G. Abdul Azeez,
S.O.C.W.
31.7.47

Superintendent

P/ unno
- M 2218 12 3/26/8

13
Dte V Dept

C.F. 16.

DRAFT FOR APPROVAL.

	Date.	Initials.
When received for fair copying ..		
When copied ..		
When examined..		
When signed ..		
When despatched.		

SUBJECT :— Industries — Sericulture — Govt. Silk Filatures, Kollegal — Repairs to the Chowkidar's quarters — Expenditure — Sanctioned

READ AGAIN _____, dated _____ 19____

" " _____ " _____ 19____

READ *ALSO* :—

C No 73444 D1 from the D I & C., No 37099/41 dated 1-8-1941.

" _____ " _____ " _____ " _____ 19____

" _____ " _____ " _____ " _____ 19____

Order ~~Resolution~~ Ms. No. 4167, dated 25-8-43 19____

Ref

H.E. the Governor of Madras permits the D I & C to incur an expenditure not exceeding Rs 90/- (Rupees Ninety only) on repairs to the Chowkidar's quarters attached to the Govt Silk Filatures, Kollegal

the expenditure is debitable to "85 A Capital Outlay on Powered Schemes of State Trading — C. Other miscellaneous schemes — J. Govt Silk Filature, Kollegal — 8 Other charges (ii) Miscellaneous expenses."

the action of the D I & C in having arranged to proceed with the work in anticipation of the sanction of the Govt is approved

(M 1381) dt 19/8/43

AM 17-8-43

Dd 2/8/43

To the D I & C.
Advised finally
Copy to Spl Cell

Note.

Please see the D/S's letter at page subject to orders, a draft order is submitted overleaf for approval. Finance may see for acceptance.

(4384) Dft 16-8-47

AM 17-8-47

Fin Exc

No 73444-DI(E)-1

19 Aug 47

Accepted

7942

SECRETARY TO GOVERNMENT 49739 20 AUG 1947 FINANCE DEPARTMENT

C&H 20-8-47

Dev

DEV DEPT Fin Exc No 49739 TECH 21-8-47

To C&H

The draft order overleaf may now issue

(2184) Dft 21-8-47

AM 22-8-47

Issued as G.O. 4167 MS Dev d 25-8-47 p 13 below

UNDER SECRETARY 21 AUG 1947 DEVELOPMENT DEPARTMENT

Clerk